

1981 Adams Avenue
 San Leandro, CA 94577
 510.567.8700
 510.567.8701 [Fax]

Sales Support
510.567.8503
510.567.8505
510.567.8506 [Fax]
800.567.1688 [Toll Free]


LT10 Dual Fiber Collimators

Performance Specifications:

Specifications	Typ.	Max.	Units
Insertion Loss *	0.35	0.5	dB
Working Distance	0.8	2.0	mm
Back Reflection	-60	-55	dB
PDL	0.02	0.05	dB


All specifications referenced without connectors.
 * Based on 0.8 mm working distance.

Dimensions

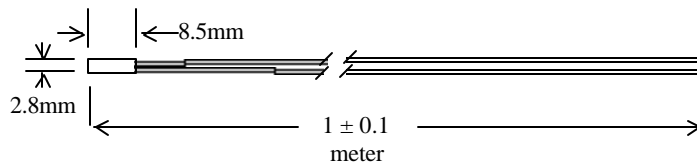

Ordering Information:⁽³⁾

Example: D5NS08G-XXX2

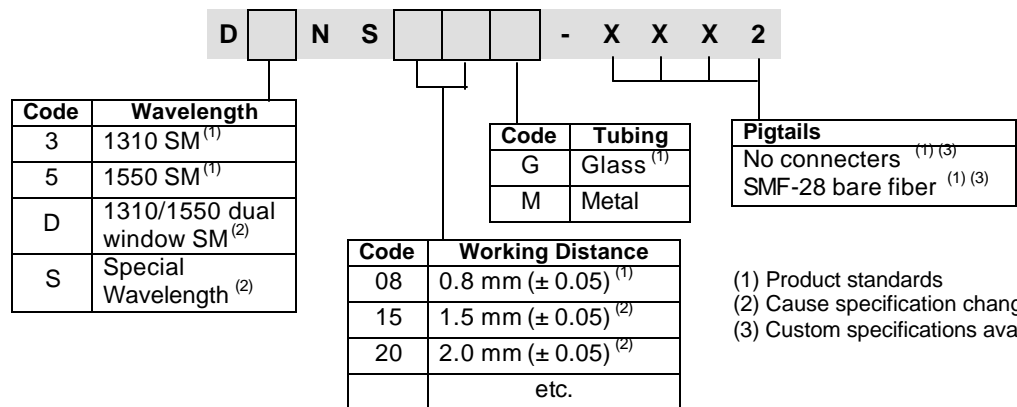

The information set forth in this document reflects our best knowledge at the time of issue. The document is subject to changes pursuant to new developments and findings, and a similar reservation applies to the properties of the products described. We undertake no liability for results obtained by usage of our products and information.